



Mike Wood Consulting LLC

3705 Ebony Hollow Pass, Austin, TX 78739

Phone: (512) 288-4916

Cell: (512) 656-6377

www.mikewoodconsulting.com

Megalite Circa LED Center Reflective Warm White Emitters

January 16, 2019

Electrical

Voltage: 120 V AC, 60 Hz

Power: 64 W

VA: 64 VA

Current: 0.51 A

PF: 1.0

Output at full

Lens	Lumens at full output	Efficacy
n/a	1,195	19 lm/W


Color Rendering

CCT: 2257 K


Duv: 0.0110

CRI (Ra): 51

Spectrum



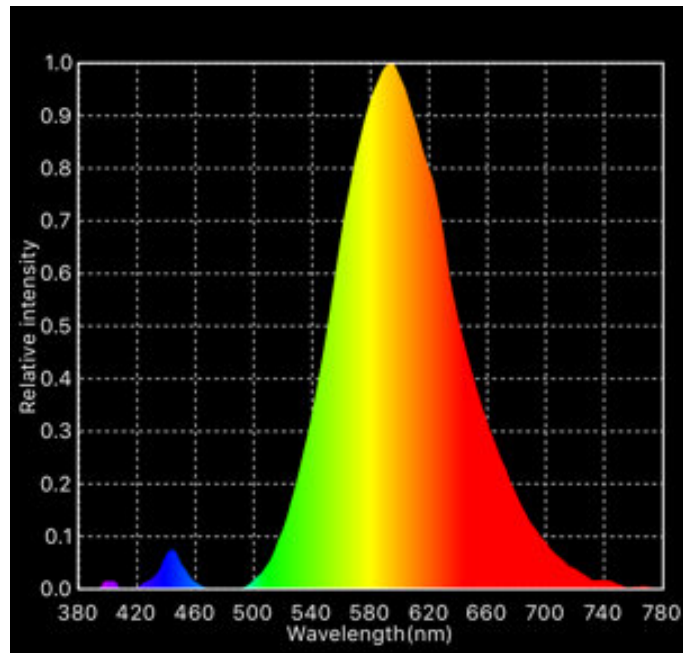


CRI Samples

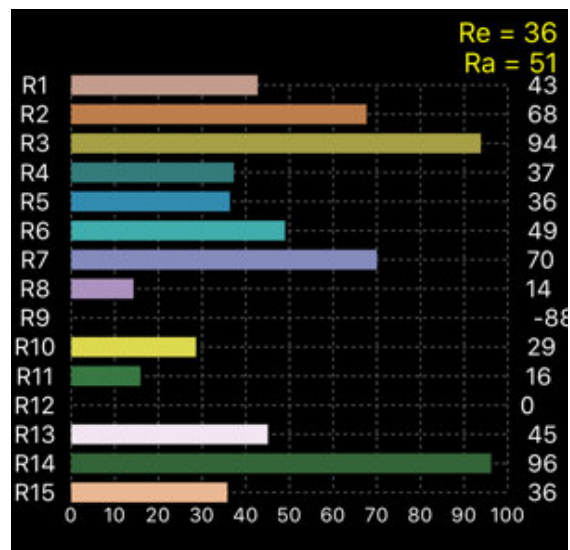

Full Output All Emitters

Lumens at full output : 1,195 lm

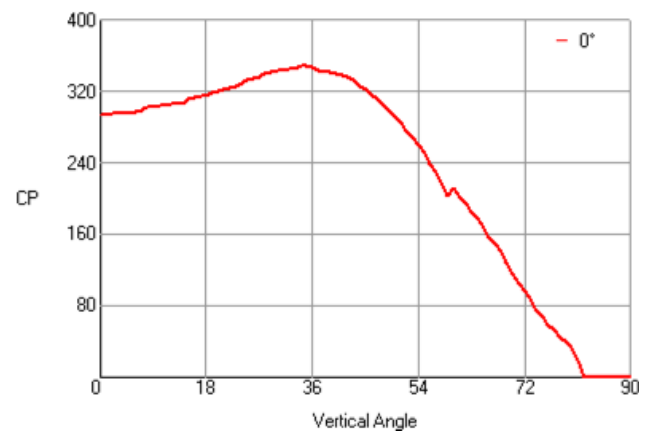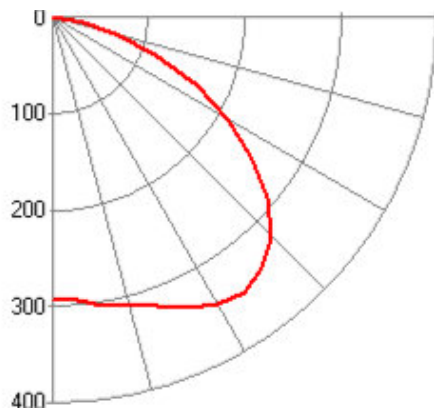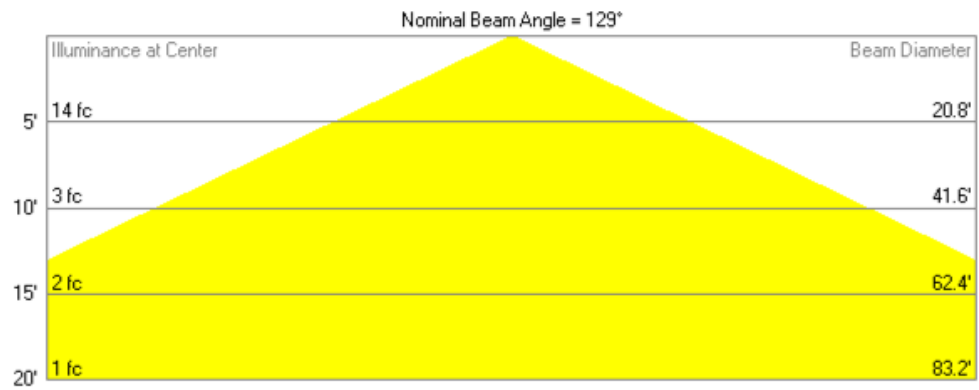

Zonal Lumen Summary

Zone	Lumens
0° - 15°	65
0° - 30°	271
0° - 45°	610
0° - 60°	956
0° - 90°	1195
0° - 180°	1195

Candela Distribution:

0.0°	293	31.0°	343	62.0°	194
1.0°	293	32.0°	345	63.0°	184
2.0°	295	33.0°	345	64.0°	178
3.0°	295	34.0°	349	65.0°	167
4.0°	295	35.0°	349	66.0°	157
5.0°	295	36.0°	347	67.0°	150
6.0°	297	37.0°	343	68.0°	140
7.0°	299	38.0°	341	69.0°	127
8.0°	303	39.0°	341	70.0°	115
9.0°	303	40.0°	340	71.0°	104
10.0°	305	41.0°	338	72.0°	96
11.0°	305	42.0°	336	73.0°	88
12.0°	307	43.0°	332	74.0°	75
13.0°	307	44.0°	326	75.0°	67
14.0°	307	45.0°	322	76.0°	59
15.0°	311	46.0°	317	77.0°	52
16.0°	313	47.0°	311	78.0°	44
17.0°	315	48.0°	305	79.0°	38
18.0°	315	49.0°	299	80.0°	33
19.0°	318	50.0°	292	81.0°	19
20.0°	320	51.0°	284	82.0°	0
21.0°	322	52.0°	276	83.0°	0
22.0°	324	53.0°	269	84.0°	0
23.0°	326	54.0°	259	85.0°	0
24.0°	330	55.0°	251	86.0°	0
25.0°	332	56.0°	238	87.0°	0
26.0°	334	57.0°	230	88.0°	0
27.0°	336	58.0°	215	89.0°	0
28.0°	340	59.0°	203	90.0°	0
29.0°	341	60.0°	211		
30.0°	343	61.0°	201		