


MEGA[®]LITE

Toad Hybrid
LED 400

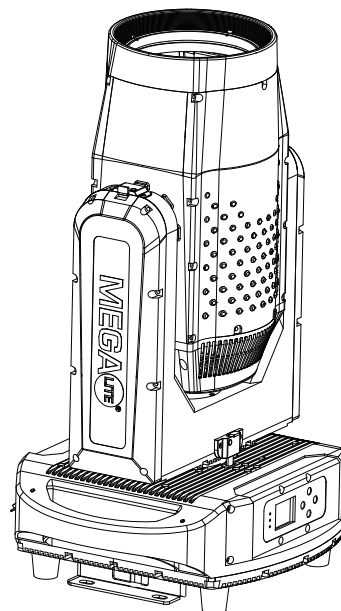

USER MANUAL

Table of Contents

Safety Information	2
What's Included	2
Specifications	3
Main Power Connection	4
DMX Connection	4
Display Settings	5
DMX Profile	8
Size And Weight	10
Installation	11
Parts and Accessories	11
Warranty	12
Customer Service	13

Check that the unit has not been damaged during transport.




Read all cautions and warnings
prior to operation of this
equipment

Protection Against Fire




1. Maintain a minimum of 1 foot distance from any type of flame.
2. Fixture is designed for indoor and outdoor use.
3. Do not install the unit too close to a heat source.
4. Make sure cables are properly secured.
5. Maximum surface operating temperature: 130°.
6. Make sure fixture lens are not pointing towards the sun or direct light input.

Protection Against Electrical Fire




1. Disconnect power before servicing.
2. For connection to main power supply, proceed to page 4.
3. The power supply must be earthed (electronically grounded).
4. This fixture must not be left on for long periods of time.

Protection Against Mechanical Hazards



1. Use secondary safety chain when hanging unit.
2. Use quality clamps or bolts when positioning unit.
3. Do not open unit while it is on. Risk of electrical shock.

Ingress Protection



The IP rating is commonly expressed as IP (Ingress Protection) is followed by 2 numbers (i.e. 65) where the numbers define the fixture rating. The first number indicates the size of a particle that can enter the fixture.. The second number indicates the extent of protection against water entering the fixture. An IP65 rating in this fixture indicates that dust particles can not enter the fixture, and there is protection against water spray from entering the fixture from any direction.

What is Included

1pc Toad Hybrid LED 400 Fixture
1pc Power Cable - Nema 5-15 to SAC3FX-67
2pc Quick Release Mount
1pc User Manual

Specifications

Fixture ID 1330 - TOAD HYBRID 400 LED

Mechanical Specifications

Housing:	Die-Cast Aluminum
Outdoor Rating:	IP-65
Mounting System:	2 Quick Release Clamp Mounts
Power Connection:	Input: Seetronics SAC3MPX-67 Output: Seetronics SAC3FPX-67-01 Cable Input: Nema 5-15 to SAC3FX-67 (cable included)
Signal Connection:	Input: Seetronics J5F2C-W-B-67 5 pin XLR Output: Seetronics K5F2C-W-B-67 5 pin XLR
Color Mix:	CMY Color Mixing
Kelvin:	Variable Color Wheel from 3500k to 6800k
Pan & Tilt:	Pan 540° 3.2S Cycle Turn, Tilt 270°
Zoom:	3° to 21° Electronic Zoom
Static Gobo Wheel:	12 Gobo's
Rotating Gobo Wheel:	7 Rotating Gobo's
Prisms:	Prism 1 - 5 Facet Linear Prism Prism 2 - 8 Facet Circular Prism
Frost:	Frost Effect
Weight:	61.2lb
Size:	16.9" X 13.8" X 26.6"

Electrical Specifications

Light Source:	400w LED
Power:	Electronic 90-250VAC 50/60Hz
Power Consumption:	427 Watts 3.55 Amps @ 120V
Power Link:	3 Units @ 120V

Control & Programming

Protocol:	DMX 512, RDM
DMX Modes:	23 Channel Mode: Pan, Pan Fine, Tilt, Tilt Fine, Pan Tilt Speed, Dimmer, Shutter, Cyan, Magenta, Yellow, CTO, Color, Static Gobo, Rotating Gobo, Gobo Rotation, Prism, Prism Rotate, Prism 2, Prism 2 Rotate, Zoom, Focus, Frost, and Control
RDM Parameters:	Fixture Label DMX Start Channel Address Channel Mode Set Temperature Sensor Keep DMX Data Scan Rate Dimmer Curve Fan Speed
Operating Mode:	DMX, Auto and Manual Settings Via Display

Main Power Connection

Caution!


1. Do not connect fixture to a dimmer system.
2. This unit must be earthed. (Electronically grounded)
3. Replace fuse only with the specified type and rating.
4. This device is equipped with auto switching power supply that will allow the fixture to work from 90-250VAC 50/60Hz
5. Power Link max 3 units at 120V

Cable USA	Cable EU	110V	220V
Black	Brown	Live	Live
White	Light Blue	Neutral	Live
Green	Yellow / Green	Ground	Ground

DMX-512 Connection


The fixture is equipped with 5 pin XLR Sockets for DMX input and output connection. The sockets are wired in parallel. Only use a shielded twisted pair cable designed for RS-485 and 5 pin XLR plugs and connectors in order to connect the controller with the fixture or the fixture with another.

DMX - Input



1.Shield (Grd)
2. Signal (-)
3. Signal (+)
4. N/A
5. N/A

DMX - Output



Caution!


On the last fixture the DMX signal needs to be terminated with a terminator. Pre-manufactured terminator are available for purchase from your Mega-Lite dealer item #P-DMX-T.

Gobos

Static Gobos:





Rotating Gobos:

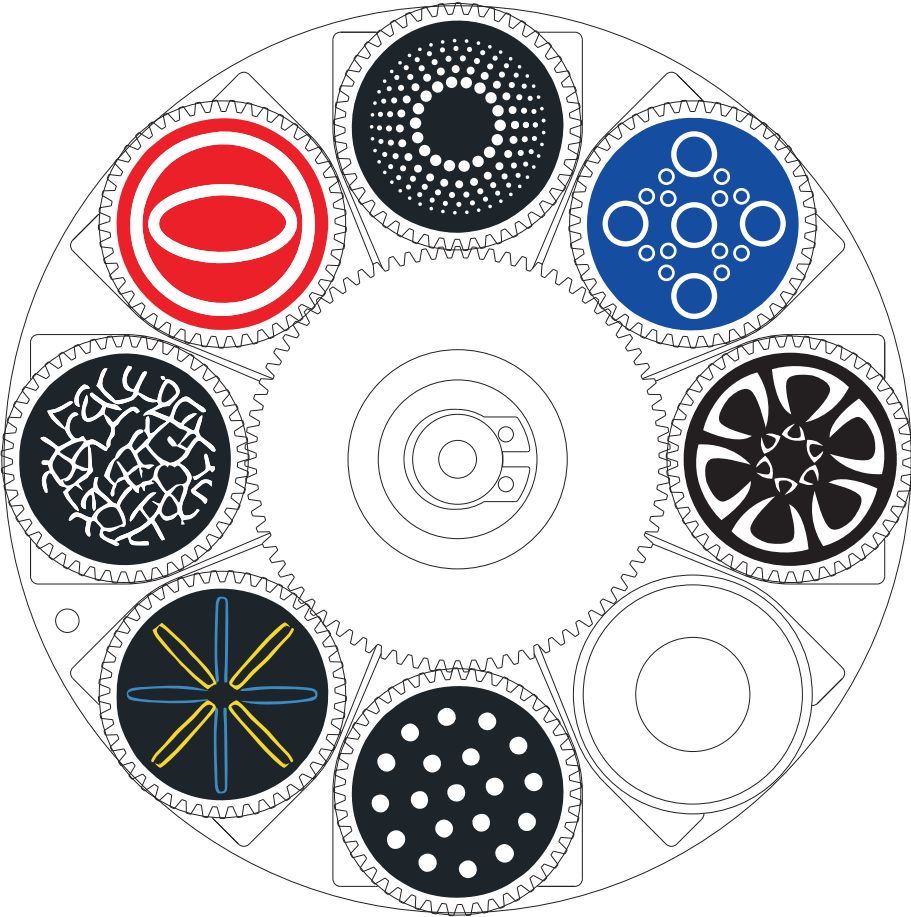


Display Control

Main Control

The control board on the fixture base is your interface to access and control all the functions on the unit. It's LCD display gives you a code view of the options and functions. The following will explain each function.



Screen Lock PASSWORD: ▲ ▲ ▼ ▼



Settings: Users can navigate through the following settings to customize the performance of the fixture according to their preferences.

Setting	
Run Mode	DMX
Scene Set	►
DMX Address	001
Device Reset	OFF
Channel Mode	23CH
Language	English
Fan Mode	Low Noise
Screen Rotation	Off
Screen Lock	Off
Invert Pan	Off
Invert Tilt	Off
Pan-Tilt Swap	Off
Pan-Tilt Encoder	On
DMX Signal	CLEAR
Clear Scene Data	No
Load Default	No

- Run Mode:** **DMX** - Fixture will respond to DMX 512.
Scene - Create up to 20 custom scenes to be stored in the fixture memory.
Auto - Fixture will automatically cycle through pre-programmed patterns, movements, and colors.
- Scene Set:** Create a custom scene that is saved to the fixture. Play back by choosing "Scene" in the "Run Mode" setting.
- DMX Address:** Sets the DMX Address.
- Device Reset:** **ON** or **OFF** - This action will reset the fixture while preserving all settings. Please note that this is not a factory reset.
- Channel Mode:** 23 Channel Mode.
- Language:** English or Chinese.
- Fan Mode:** **Standard** - The fan will function in its standard mode.
Low Noise - The fan operates at a reduced RPM to minimize noise, light output is slightly reduced.
- Screen Rotation:** **OFF** - Screen is locked to the default orientation.
ON - Allows the user to adjust the orientation of the display screen.
- Screen Lock:** **ON** or **OFF** - Prevents accidental changes to the settings or controls by locking the display screen.
- Invert Pan:** **ON** or **OFF** - User can change the orientation of the fixture's pan movement.
- Invert Tilt:** **ON** or **OFF** - User can change the orientation of the fixture's tilt movement.
- Pan-Tilt Swap:** **ON** or **OFF** - User can interchange the movement controls for horizontal (pan) and vertical (tilt) axes.
- Pan-Tilt Encoder:** **ON** or **OFF** - Setting this to **OFF** will disengage the Pan\Tilt motors.
- DMX Signal:** **CLEAR** - The fixture will clear DMX signal values when DMX signal is lost
KEEP - The fixture will retain its current DMX signal values even when the DMX signal is lost.
- Clear Scene Data:** This will delete all scenes created and stored in the fixtures memory (SCENE).
- Load Default:** Restores the fixture to its original factory settings. All customized configurations and adjustments made by the user are cleared, returning the fixture to its default parameters.

Scene Set

Scene Select	01
Scene Time	005
Auto Run	Off
1.Pan	000
2.Pan Fine	000
3.Tilt	000
4.Tilt Fine	000
5.Pan-Tilt Speed	000
6.Dimmer	000
7.Shutter/Strobe	000
8.Cyan	000
9.Magenta	000
10.Yellow	000
11.CTO	000
12.Color	000
13.Gobo	000
14.Gobo 1	000
15.Gobo Rt	000
16.Prism1	000
17.Prism1 Rotation	000
18.Prism2	000
19.Prism2 Rotation	000
20.Zoom	000
21.Focus	000
22.Frost	000

Scene Set: To set values for manual scenes, Use arrows to select and adjust your settings to achieve your desired look. Next, choose a memory position (1-20) and press enter to store the scene in memory. To play back a scene, set the **RUN MODE** to **SCENE** and select the desired memory position.

Manual

1.Pan	000
2.Pan Fine	000
3.Tilt	000
4.Tilt Fine	000
5.Pan-Tilt Speed	000
6.Dimmer	000
7.Shutter/Strobe	000
8.Cyan	000
9.Magenta	000
10.Yellow	000
11.CTO	000
12.Color	000
13.Gobo	000
14.Gobo 1	000
15.Gobo Rt	000
16.Prism1	000
17.Prism1 Rotation	000
18.Prism2	000
19.Prism2 Rotation	000
20.Zoom	000
21.Focus	000
22.Frost	000
23.Reset	000

Manual Control: Adjustment of each channel from the Display. Use the Enter and Up/Down buttons to adjust the value of each channel manually to desired effect.

Info

Version	▶
Time Information	▶
System Warning	▶
MT Hall	1101111
Panwheel Step	+3750
Tiltwheel Step	+1401
Authority Hours	9999

Fixture Info Menu: Shows information related to fixture systems.

Version Info: Shows current software version.

Time Information: Fixture runtime information.

System Warning: System error information.

Sys Version

Ver:	T172B-V.240928
DIS	V.7.1.1.240928
MT1	V.7.1.3.240928
MT2	V.7.1.1.240928

Version Info: Shows current software versions.

System Time

Total Lamp:	00020:20
Total User:	00020:00

Time Information: Total Lamp and Total User tracks the runtime of the lamp and fixture.

System Error

No Error

System Error: Will display any system errors detected.

Factory

Input Password

Factory Menu: Shows information related to fixture systems.


Password: UP, DOWN, UP, DOWN, ENTER.

Toad LED Hybrid

23 Ch Mode	Function	Description	Value	Init
1	Pan	Pan	0-255	127
2	Pan Fine	Pan Fine	0-255	127
3	Tilt	Tilt	0-255	127
4	Tilt Fine	Tilt Fine	0-255	127
5	Pan Tilt Speed	Pan & Tilt Speed (fast to slow)	0-255	0
6	Dimmer	Dimmer (off to full)	0-255	255
7	Shutter	open	0-3	3
		Strobe	4-103	
		Open	104-107	
		Pulse	108-207	
		open	208-212	
		Random Strobe (slow to fast)	213-251	
		Open	252-255	
8	Cyan	Cyan	0-255	0
9	Magenta	Magenta	0-255	0
10	Yellow	Yellow	0-255	0
11	Kelvin	3800K-8533K	0-255	0
12	Color	Open	000-007	0
		Red	008-017	
		Yellow	018-027	
		Blue	028-037	
		Green	038-047	
		Magenta	048-057	
		Orange	058-067	
		Blue Green	068-077	
		Light Blue-Purple	078-084	
		Clockwise Scroll	085-170	
13	Static Gobo	Counter Clockwise Scroll	171-255	
		Open	000-004	0
		Gobo 1	005-009	
		Gobo 2	010-015	
		Gobo 3	016-020	
		Gobo 4	021-025	
		Gobo 5	026-030	
		Gobo 6	031-035	
		Gobo 7	036-040	
		Gobo 8	041-045	
		Gobo 9	046-050	
		Gobo 10	051-055	
		Gobo 11	056-059	
		Open Shake	060-064	
		Gobo 1 Shake	065-069	
		Gobo 2 Shake	070-074	
		Gobo 3 Shake	075-079	
		Gobo 4 Shake	080-084	
		Gobo 5 Shake	085-089	

		Gobo 6 Shake	090-094	
		Gobo 7 Shake	095-099	
		Gobo 8 Shake	100-104	
		Gobo 9 Shake	105-109	
		Gobo 10 Shake	110-114	
		Gobo 11 Shake	115-119	
		Counter Clockwise Scroll	120-190	
		Clockwise Scroll	121-255	
14	Rotating Gobo	Open	000-004	0
		Big Gobo open	005-009	
		Rotating Gobo 1	010-019	
		Rotating Gobo 2	020-029	
		Rotating Gobo 3	030-039	
		Rotating Gobo 4	040-049	
		Rotating Gobo 5	050-059	
		Rotating Gobo 6	060-069	
		Rotating Gobo 7	070-079	
		Rotating Gobo 1 Shake	080-089	
		Rotating Gobo 2 Shake	090-099	
		Rotating Gobo 3 Shake	100-109	
		Rotating Gobo 4 Shake	110-119	
		Rotating Gobo 5 Shake	120-129	
		Rotating Gobo 6 Shake	130-139	
		Rotating Gobo 7 Shake	140-149	
		Counter Clockwise Scroll	150-200	
		Clockwise Scroll	201-255	
15	Gobo Rotation	Index	000-127	0
		Clockwise Rotation (Fast to Slow)	128-191	
		Counter Clockwise Rotation (Slow to Fast)	192-255	
16	Prism	Prism Ejection	000-127	255
		Prism Insertion	128-255	
17	Prism Rotate	Prism Index	000-127	255
		Clockwise Rotation (Fast to Slow)	128-191	
		Counter Clockwise (Slow to Fast)	192-255	
18	Prism 2	Prism 2 Ejection	000-127	0
		Prism 2 Insertion	128-255	
		Prism 2 Index	000-127	0
19	Prism 2 rotate	Prism 2 Clockwise Rotation (Fast to Slow)	128-191	
		Prism 2 Counter Clockwise Rotation (Slow to Fast)	192-255	
20	Zoom	Zoom	000-255	0
21	Focus	Focus	000-255	0
22	Frost	Frost	000-255	0
23	Control	Reserved	000-249	
		Reset (Hold for Three Seconds)	250-255	0

Size and Weight

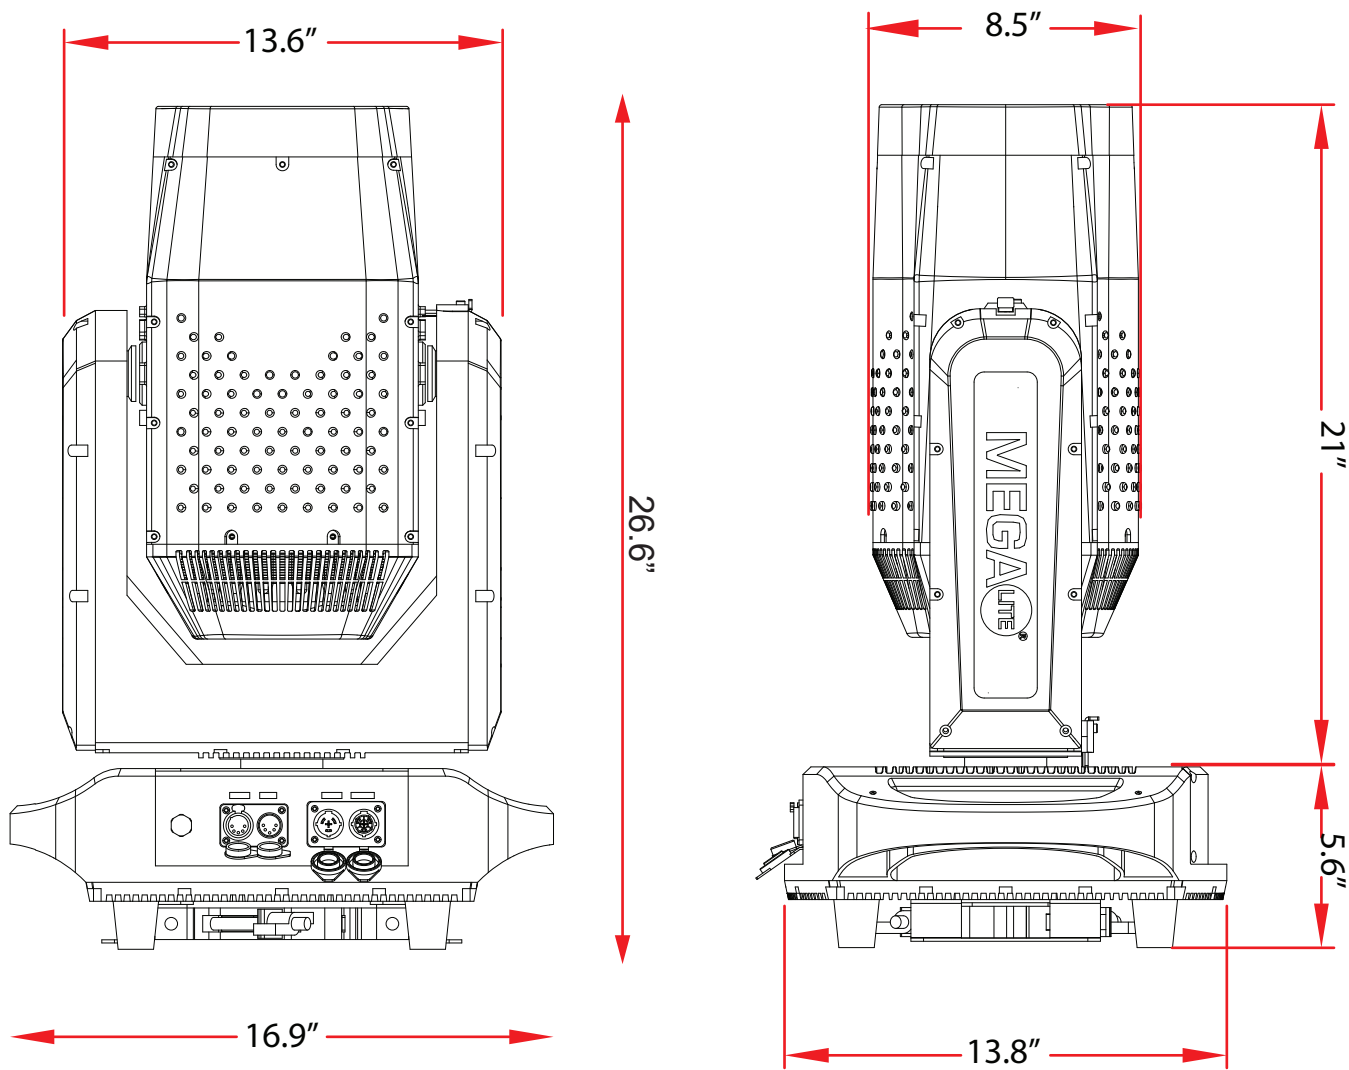

Fixture Size:	16.9" X 13.8" X 26.6"
Fixture Weight:	61.2lb
Packaged Size:	20" X 18.5" X 27"
Packaged Weight:	75lb

Installation

Caution!

1. The Installation must be carried out by an authorized dealer or trained professional.
2. Unit may cause severe injuries, if you have doubts concerning the safety do not install.
3. Unit is to be 24 inches away from flammable materials.
4. Use high quality installation equipment to hang the unit.

When rigging the it is very important that you follow common safety procedures. Rigging requires extensive experience including but not limited to calculating working weight loads, material being used and periodic safety inspections. If you lack these qualifications, do not attempt the installation yourself, instead use a professional structural rigger.

When rigging the unit always be secure with a secondary safety attachment. The installation location of the fixture has got to be built in the way that it can hold 10 times the weight for 1 hour with out any failures. Installation should be checked at least one time a year by a skilled professional.

Parts & Accessories

Part Number	Description
1330-HOU-BOD	Aluminum Housing Body
1330-HOU-ARM	Aluminum Housing Arm
1330-HOU-FRO	Aluminum Housing Front
1330-HOU-BAC	Aluminum Housing Back
1330-HOU-QUI	Quick Release Clamp Mount
1330-HOU-LOC	Pan Tilt Lock
1330-FAN-120	IP Rated 120mm Fan
1330-FAN-60-30	60mm Fan 30a
1330-FAN-60-16	60mm Fan 16a
1330-FAN-55	55mm Square Fan
1330-PCB-DIS	PCB Display
1330-PCB-MOT	PCB Motor Driver (Arm Mounted)
1330-PCB-MOT-SMA	PCB Small Motor Driver (Head Mounted)
1330-LED	LED
1330-BAN-PAN	Band for Pan
1330-BAN-TIL	Band for Tilt
1330-POW	Power Supply

General Terms & Conditions

1. All resellers must have approved and signed Reseller Application on file, including their respective state tax information and W-9. Applications are re-evaluated on a fiscal calendar year basis to assure business integrity and tax status.
2. Cash, check, cashiers check, ACH, wire transfer, MasterCard, Visa, Discover, and American Express are accepted forms of payment.
3. Past due invoices will be charged 1.5% per month finance charge. Uncollected invoices are subject to be turned over to collection.
4. The reseller will pay all reasonable expenses incurred in the course of collections.
5. The proper venue for litigation will be Bexar County, Texas.
6. Returned checks will be charged a \$50.00 fee.
7. All prices are in U.S. Dollars.
8. All prices and specifications are subject to change without notice, sales order confirmations are emailed and will reflect correct pricing.
9. All terms are insured, monitored, analyzed and approved by Coface USA. Changes in credit line and approved terms can change without notice. Company authorization of credit is based on Coface approvals. Any conflicts or disagreements should be referred to: 650 College Rd East Suite 2005 Princeton, NJ 08540. 1-609-469-0400. E-mail: cofaceusa@coface.com
10. Returns are subject to 25% restocking charge plus any necessary charges for repair or re-packaging.

Shipping Terms & Conditions

1. All orders are EXW San Antonio, TX (EXW means that a buyer/reseller incurs the risks for bringing the goods to their final destination) any deviation needs to be done in writing.
2. UPS ground shipping is the preferred shipping method. Requests for specific carriers may require use of the customer's account number and may incur an additional charge for handling.
3. Drop shipments are subject to all return charges at resellers expense. Drop shipments are not allowed outside of the territorial United States.
4. NO C.O.D. shipments allowed.
5. Returned and undelivered shipment charges are the buyer/resellers responsibility and will be billed to the buyer/reseller.
6. The freight carrier and Company shipping@mega.lighting should be notified upon receipt of damaged freight, discrepancies, or non-conformities within 24 hours. Company can assist in making claims with carriers or agents in the event of any loss or damage.
7. Upon acceptance in good order by Carrier from Company, the material becomes the property of the Reseller.

Warranty and Service Procedures

1. All returns require an RMA# (Return Merchandise Authorization number) before returning goods for any reason. For a service or warranty RMA, please email service@mega.lighting or call (210)684-2600. For sales or demo returns, please contact sales@mega.lighting.
2. Case will be created and an RMA notice will be emailed. All units received must have the RMA # included with the unit as well as on the shipping label.
3. All shipping charges are the responsibility of the customer: MEGA Systems, Inc., Service, 18668 HWY 16 N., Helotes, TX 78023

Warranty for Products Purchased Before 2021

Unless otherwise stated in writing, product is covered by a one year parts and labor limited warranty and is subject to same limitations listed under the limited warranty exclusions listed below.

Warranty for Products Purchased After January 1, 2021

MEGA SYSTEMS INC ("MSI") hereby warrants to the original purchaser/owner (Customer"), MSI products to be free of manufacturing defects in material and workmanship, for the warranty periods as defined below from the original purchase invoice date. This warranty applies exclusively to new MSI branded and/or distributed products listed below, purchased from an MSI AUTHORIZED dealer/reseller. This warranty is not transferrable and may or may not apply to products sold and/or forwarded outside the United States. Please contact MSI for applicable regional product warranty information.

The purchase of MSI product constitutes the Customer's acceptance of all warranty terms and conditions as listed in this limited warranty statement. This warranty provides the Customer with legal rights, which may vary from state to state. Please contact MSI regarding warranty questions prior to purchasing.

Product / Series	Warranty Period	Coverage
Battery Powered LED	Six month battery, one year all other components	1, 2
Moving LED, Hazers	One Year	2
Outdoor IP-Rated LED	Two Years	3
House Light LED, Decorative LED, Compact LED, iCandy LED, Theatrical LED, Strobe Wash LED, Follow Spot LED, Production & House of Worship Control, Architectural Control, Theatrical Control, Dance Venue & Mobile DJ Control, Direct View LED Displays, and MV Controllers	Three Years	4

1. Battery: 183 days/six months 2. Parts and Labor: 365 days/one year 3. Parts and Labor: 730 days/two years 4. Parts and Labor: 1095 days/three years

This limited warranty excludes any defects caused by, resulting from, or relating to the following:

Normal wear and tear of lamps, color media, brushes, contact rings, lamp sockets, belts and other parts prone to wear and tear.

Misuse, abuse, improper handling, accident, alteration or attempts to repair by or on behalf of the owner or any person not authorized by MSI.

Damage to the product resulting from acts of God, including but not limited to, earthquakes, hurricanes, tornadoes, lightning and other natural disasters, fire, explosion, flood, riots, civil disorder or any other cause beyond the reasonable control of MSI.

Exposure to harsh or excessively corrosive environmental conditions (whether indoors or outdoors) including, but not limited to, extreme temperature, humidity, atmospheric conditions (including salinity or pressure), radiation (UV, infrared or nuclear), shock and conditions which exceed the product's Ingress Protection ("IP") rating.

Use of the product in a manner which exceeds the applicable product specification, including, but not limited to, exposure to excessive, insufficient, or other voltage conditions.

Installation or use of the product not in accordance with the technical documentation, MSI guidelines (as may be posted on its website at www.megasystemsinc.com from time to time or otherwise designated by MSI or its brands) or applicable building and electrical codes, regulations, and standards.

Failure to maintain the product in accordance with the technical documentation.

Natural degradation and color shift of the LED source over the course of normal product use.

Slight deviations in the specified values of intensity and color that do not affect the functionality of the product.

Use of the product not for its intended purpose.

All warranty claims are evaluated under the terms of this limited warranty. If a product falls within the warranty period and if, upon examination by MSI, it is found to have failed for a covered cause, MSI will, at its sole discretion, repair or replace the defective part or product or reimburse the purchaser a pro-rated portion of the purchase price based on the percentage of the warranty period still remaining as of the date that the returned product was received by MSI. Should a replacement part or product be discontinued or unavailable, MSI reserves the right, in its sole and absolute discretion, to substitute a comparable replacement part or product for the defective part of product. MSI warranty obligation herunder is limited solely to the repair or replacement of or reimbursement for the particular parts or products determined by MSI to have failed for a covered cause within the warranty period. In no event shall MSI be responsible to replace or reimburse purchaser for any products or portions of a system that MSI determines has not failed for a covered cause within the warranty period, even if such other products or portions of a system are used together with products being repaired or replaced by MSI under this warranty and the repaired product differs in brightness, colors or any other attribute after the repair.

Costs of removal, shipping to MSI or its authorized representative and reinstallation are solely the responsibility of the purchaser. If MSI determines that the product is covered by this limited warranty, it will only pay for parts and labor as indicated by product type. If MSI determines that the product is not covered by this limited warranty, the purchaser will have the option of paying for the repair if the product can be repaired and the purchaser shall be responsible for the cost of shipping the repaired product back to the purchaser. MSI reserves the right, in its sole and absolute discretion, to decline any repair.

IN NO EVENT SHALL MEGA SYSTEMS, INC. BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, SPECIAL, INDIRECT OR PUNITIVE LOSS OR DAMAGE OF ANY KIND, INCLUDING, BUT NOT LIMITED TO, LOSS OF PROFITS OR REVENUES, LOSS OF USE OF THE PRODUCT OR ANY OTHER GOODS OR ASSOCIATED EQUIPMENT, DAMAGE TO ANY ASSOCIATED EQUIPMENT, COST OF CAPITAL, COST OF SUBSTITUTE PRODUCTS, FACILITIES OR SERVICES, DOWN TIME COST, INSTALLATION OR LABOR COSTS, OR CLAIMS OF THE PURCHASER'S CUSTOMERS, WHETHER BASED ON WARRANTY, CONTRACT OR NEGLIGENCE, ARISING IN CONNECTION WITH THE SALE, USE OR REPAIR OF THE PRODUCT. MEGA SYSTEMS INC'S MAXIMUM LIABILITY SHALL NOT, IN ANY CASE, EXCEED THE PURCHASE PRICE OF THE PRODUCT THAT GIVES RISE TO THE CLAIM.

EXCEPT FOR THE LIMITED WARRANTY SET FORTH HEREIN, ALL PRODUCTS SOLD BY MEGA SYSTEMS, INC. ARE SOLD "AS IS" WITHOUT ANY WARRANTY, EXPRESS, OR IMPLIED, STATUTORY OR OTHERWISE, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OR MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE EXPRESSLY AND SPECIFICALLY DISCLAIMED BY MEGA SYSTEMS, INC.

Customer Support

MEGA-Lite has a customer support line to provide set-up help and to answer any questions should you encounter a problem. Please visit our website for any other related technical documents. For service related issues, please contact our service dept.

Monday - Friday 9am to 6pm CST
(210)684-2600
Service@mega.lighting

Manual Version

Please visit www.mega.lighting for the most up-to-date manual version.

Manual Version	Date	Fixture Software	Notes
1.1	05/30/2025	1.0.0	



MEGA LITE
18662 Bandera Rd
Helotes, TX 78023
Phone (210)684-2600 / Fax (210)855-6279
www.mega.lighting / info@mega.lighting