

MEGA LITE

Disco SPLITTER

DESCRIPTION:

The Disco Splitter is an Disco interface and four-output splitter all-in-one. The Disco DMX to USB interface is built right in. The unit has two inputs for when it is not being used with the Disco software. Each output and input has a 3-pin and 5-pin XLR connectors. Electronic isolation is used between input and output, and output and output. Its dimensions are 19" W x 6" L x 1.75"H. It has removable rack ears for rack mounting front or back and it is also wall mountable.



USER FRIENDLY




USER FRIENDLY

BEAT DETECT



TRANSITION LIGHTING &
VIDEO SIMULTANEOUSLY

3D



3D VISUALIZER

BUILT-IN EFFECTS



RGB, MOVEMENT, SPECIFIC
CHANNELS AND MORE



MEGA LITE | DISCO SPLITTER | Product Specification Sheet

KEY FEATURES:

SOFTWARE SPECIFICATIONS:


PART NUMBER:	MC1010
OUTPUT PROTOCOLS:	DMX-512
OUTPUT SPECIFICATIONS:	4 Outputs, 3 & 5 pin XLR connectors
CUES SEQUENCES:	Unlimited Buttons
SAVING FEATURES:	Back up and restore show file to USB to recall on any PC
PRESETS:	Automatically generated from fixture's profiles or can be made custom
PLAYBACK CONTROL:	Stack as many buttons (Playbacks) as needed Each Look or Sequence can be Locked for house or ambient lighting Button Groups allow for multiple Fixture types on a single page Color Coded Button Groups allow for sub master, manual cross fade, or auto cross fade with adjustable cross fade times for each group of buttons Move any button to any position on screen Easy Assignable keyboard shortcut for each button Easy Assignable MIDI command for each button and sub master for external hardware control SOLO mode for any fixture Live control override at any time.
PROGRAMMING CONTROL:	Program looks step by step without the wizard with ease Fog and Haze Control on Main Screen Palette presets is the foundation of the programming system (position Presets) Audio Input or tap synch available for each button Unlimited pages of buttons that trigger Still Looks, Sequences, Multiple Buttons and Timeline schedules Easy to create Fixture Groups creation Palettes are automatically created on Patching or can be made custom Multiple Views to arrange graphically fixtures in different rooms or areas Direct fader Control with virtual Wheel Controls gives better direct control Expandable Up to 6 Universes (CPU and USB interface dependent) Unlimited fixtures and buttons LED Matrix engine and LED Macros

Size:

19"x1.75"x6"
Packed for Shipping:
20"x7.5"x3"

Weight:

6 lbs
Packed for Shipping:
7lbs

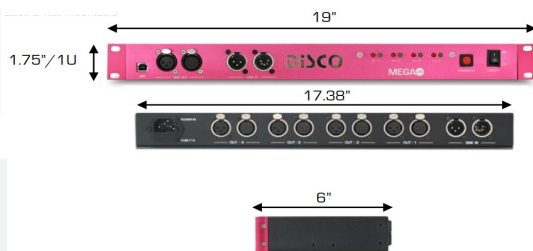

• Mechanical Specifications:

Front and Rear 3-pin & 5 Pin XLR connectors , 4 output / 3-pin & 5 Pin XLR connectors, IEC power connection to Edison, 1U Rack Mountable front, back or wall mountable

• Electrical Specifications:

Enlighten USB Interface connectedly internally to splitter input Electronic isolation between input & output, Electronic isolation between output and output, Terminator button for last unit, Power indicator, Signal indicator, Power Consumption: 110V-60 Hz