


Tetra Driver 16

deco line.



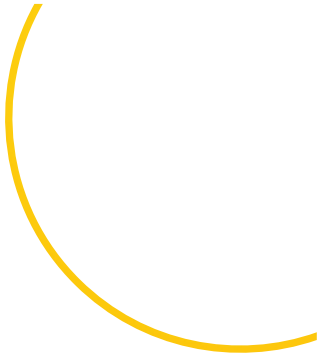

deco line

Deco Line brings smart technology to any space — effortlessly. Featuring intuitive lighting controllers and low-voltage LED fixtures, this system is designed for easy integration in homes, hotels, and commercial environments.


INTUITIVE

SMART

DURABLE



DESCRIPTION

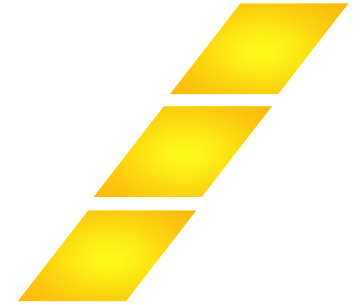

Designed to seamlessly control our Light Pipe and Deco Line units, this all-in-one solution has 16 outputs that can be individually addressed within your preferred channel mode.

To further enhance versatility, this powerful driver features removable rack ears, allowing for easy wallmounting, rack mounting, or rear rack installation, accommodating various setup requirements.

Features.



16 INDIVIDUAL CONTROLS

This versatile device features a remarkable 16 60W outputs, Each port can connect up to 60W of power. When using our Light Pipe series you can create many different combinations of lengths.



RDM

Benefit from the added advantage of Remote Device Management (RDM) signal regeneration. The Tetra Driver 16 restores and stabilizes RDM signals, allowing you to maintain constant control and monitoring of your DMX lighting fixtures.



FIELD MOUNTABLE

With its flexible field-mountable design, this unit is perfect for indoor installations, ensuring precise lighting control and enhancing the ambiance of your events.

Specifications.

Mechanical Specifications

Housing:	Aluminum
Display:	Digital
IP Rating:	IP 20
Fastening system:	Rack Mount, Removable Clamp Mounts, Rear Rail Removable Mounts
DMX connection:	5 Pin XLR In and Out & RJ45 In and Out
Output connection:	16 X RJ45 Outputs
Power connection:	Seetronics SAC3MPA (Seetronics SAC3FCA to nema 5-15 cable included)

Electrical Specifications

Output ports:	16
Power per port:	60W
Drive method:	Constant voltage
Total max power:	960W
Power supply:	2 X Mean well UHP
Output: 24Vdc	24Vdc
Working ambient temp:	24°f - 148°f
Cooling:	Fan Cooled
Refresh:	4,000Hz
Power input:	90-264V AC 50/60Hz

Control Systems

Protocol:	DMX 512	
DMX 7 Modes:	16 Channel mode	16 x Dimmer
	32 Channel mode	16 x WW, CW
	48 Channel mode	16 x R, G, B
	64 Channel mode	16 x R, G, B, W
	112 Channel mode	7ch Dimmer, R, G, B, W, Strobe, Macro
RDM:	Yes, Addressing, channel mode control	
Operating mode:	17 Pre programs, Manual settings via display	

Size and Weight

Fixture Size & Weight:	19" x 10.5" x 3.5" & 12 lbs
Packaged Size & Weight:	21.3" x 13" x 5.5" & 16.5 lbs



18662 Bandera Rd
Helotes, TX 78023

Phone (210)684-2600 / Fax (210)855-6279
info@mega.lighting

m e g a . l i g h t i n g