

DRAMA

FS-LED 700



MEGA[®]LITE

PRODUCT SPECIFICATION SHEET

DESCRIPTION

The Drama FS-LED 700 is an extremely powerful follow spot LED fixture with a 350-W LED, producing outputs comparable to a 700-watt lamp or brighter. Faders and buttons are located directly on the back of the fixture to control the unit's features. The unit has a color wheel that produces a red, green, yellow, blue, orange and white spotlight. It features a CTO wheel, used both for adjusting color temperature and the color hue of each primary and secondary color. The diameter of the spot can be easily adjusted with the unit's built-in iris, great for long throw highlighting of small objects on stage. The fader allows for smooth dimming while the strobe fader controls the random and variable strobing of the LED for fantastic effects. The unit is compact, allowing for easy transport and use in cramped spaces.



BRIGHTNESS

The Drama FS-LED 700 has a very bright 350W LED lamp with 3 color temp: 4353K, 4997K, 5062K.



EFFECTS

The Drama FS-LED 700 has a multitude of effects including strobe, iris, dimmer, focus, zoom and, 5 color wheel.



CONTROL

Controlled by a rear mounted controller the Drama FS-LED 700 is easy to control.

SOURCE

• LED TYPE: 350W LED

EFFECTS

• COLOR WHEEL: 5 COLOR WHEEL WITH BUTTON CONTROL
• FOCUS: MANUAL FOCUS
• IRIS: MECHANICAL IRIS WITH FADER CONTROL
• DIMMER: MECHANICAL DIMMER WITH FADER CONTROL
• STROBE: MECHANICAL STROBE 1-20 PER SECOND
• CTO: 3 CTO FILTERS 4353K,4997K, 5062K FADER CONTROL
• CRI: 92.4>

CONTROL

• CONTROL: REAR MOUNTED CONTROLLER

ELECTRICAL & CONNECTIONS

• POWER CONNECTION: POWER CON TYPE
• POWER SUPPLY: ELECTRONIC AUTO SWITCHING 100V≈240V 50/60HZ
• POWER CONSUMPTION: WATTS: 608 AMPS: 5.12

RIGGING:

• FASTENING SYSTEM: 1 ADJUSTABLE YOKE (STAND INCLUDED)

ORDERING INFO:

• DRAMA FS-LED 700

INCLUDED ITEMS:


• POWER CABLE

DIMENSIONS:

• FIXTURE SIZE: 23.83" X 7.75" X 11.75"
• FIXTURE WEIGHT: 21.7 lb
• PACKAGED SIZE: 26" X 12" X 12"
• PACKAGED WEIGHT: 27 lb

PART NUMBER:

7046

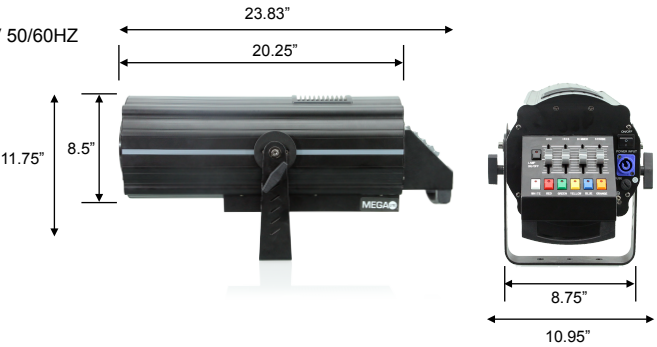

PHOTOMETRICS:

FIXTURE OPEN:	
CCT	5080 K
CRI	91.1
Lux	130111.6
fc	12092.2

CTO 1:	
CCT	5062 K
CRI	89.3
Lux	128548.8
fc	12094.2

CTO 2:	
CCT	4997 K
CRI	90.6
Lux	130133.9
fc	12094.2

FIXTURE OPEN:-3	
CCT	4353 K
CRI	92.4
Lux	130111.6
fc	12092.2