

DRAMA

FS-LED 900




MEGA^{LITE}

PRODUCT SPECIFICATION SHEET

DESCRIPTION

The Drama FS-LED 900 is an extremely powerful follow spot LED fixture. Faders and buttons are located on the included DMX controller. The unit has a color wheel that produces a red, green, yellow, blue, orange and white spotlight. It features a CTO wheel, used both for adjusting color temperature and the color hue of each primary and secondary color.

The diameter of the spot can be easily adjusted with the unit's built-in iris, great for long throw highlighting of small objects on stage. The Drama FS-LED 900 has a fader for controlling the smooth dimmer. The unit ships with the stand and is compact, allowing for easy transport and use in cramped spaces.

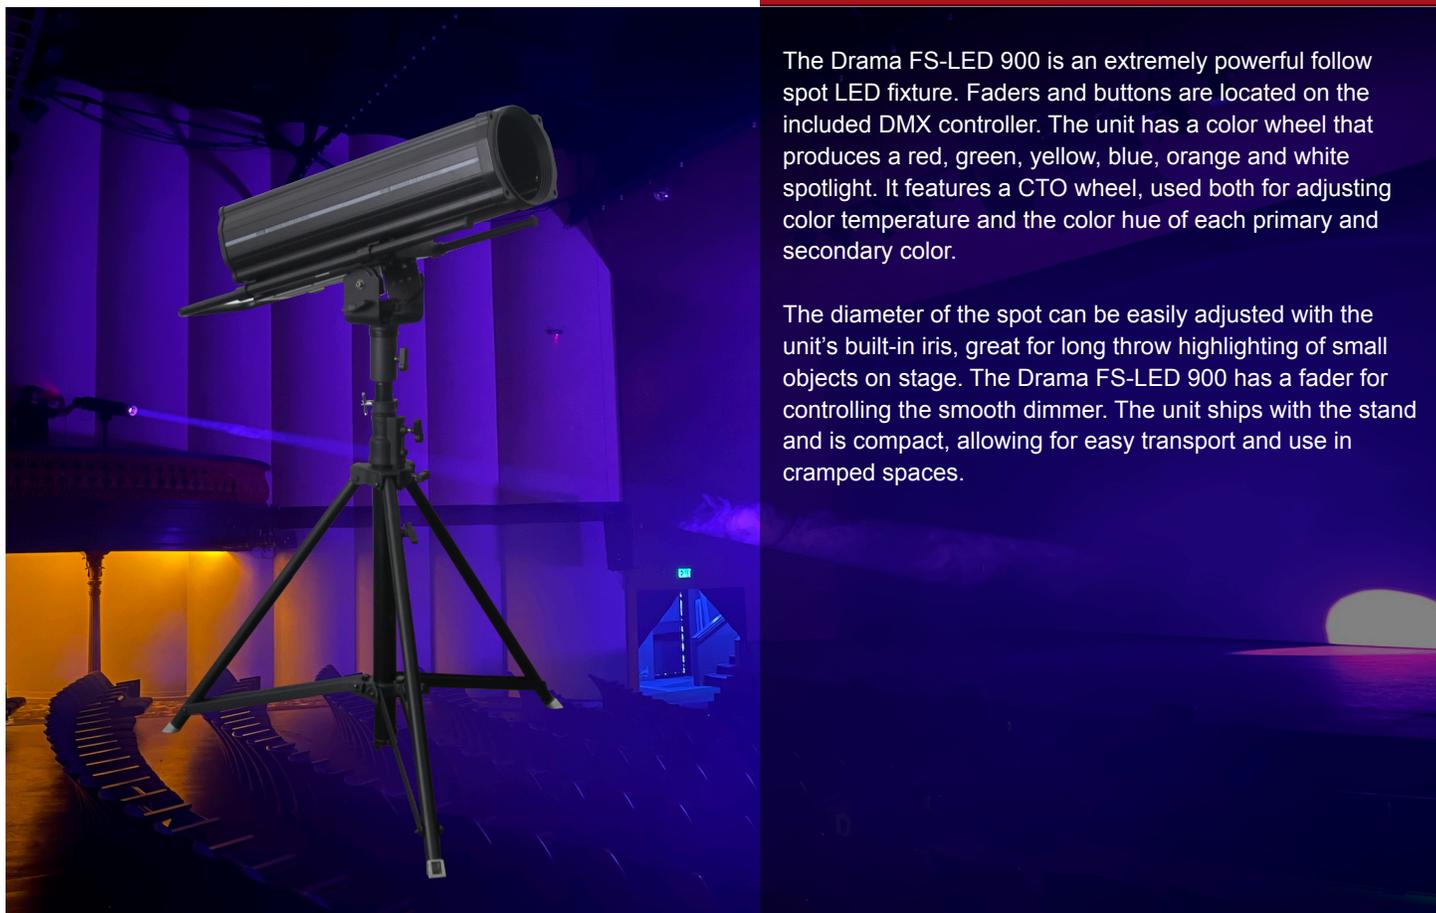

BRIGHTNESS

The Drama FS-LED 900 is equipped with a 350W COB LED and 3 color temps 4353K, 4997K, 5062K.



EFFECTS

The Drama FS-LED 900 has a multitude of effects including iris, dimmer, focus, shutter, zoom & 5 color wheel with fader.



CONTROL

The Drama FS-LED 900 is equipped with DMX rail mounted controller for easy control.

SOURCE

• LED TYPE: 350W COB LED

OPTICAL SYSTEM

• ZOOM: 8°-13°

EFFECTS

• COLOR WHEEL: 5 COLOR WHEEL WITH FADER/DMX CONTROL
 • FOCUS: MECHANICAL FOCUS WITH FADER/DMX CONTROL
 • IRIS: MECHANICAL IRIS WITH FADER/DMX CONTROL
 • DIMMER: ELECTRONIC DIMMER WITH FADER/DMX CONTROL
 • SHUTTER: ELECTRONIC SHUTTER WITH DMX CONTROL ONLY
 • CTO: 3 CTO FILTERS 4353K, 4997K, 5062K
 • CRI: 91.1>
 • CCT: 5080K ON OPEN

CONTROL & PROGRAMMING

• DISPLAY: DIGITAL
 • PROTOCOL: DMX 512
 • DMX CHANNELS: 7 CHANNEL MODE
 • OPERATING MODE: RAIL MOUNTED CONTROLLER

THERMAL & RATINGS

• MAX AMBIENT TEMP: 40° C (104°F)
 • MAX SURFACE TEMP: 60° C (140°F)

ELECTRICAL & CONNECTIONS

• POWER CONNECTION: PANEL MOUNT POWER CON TYPE IN/OUT
 • DMX CONNECTORS: 3 AND 5-PIN XLR CONNECTORS IN/OUT
 • POWER CONSUMPTION: UNIVERSAL 100 - 240V 50/60 HZ

RIGGING:

• MOUNTING SYSTEM: MOUNTING YOKE FOR STAND

ORDERING INFO:

• DRAMA FS LED 900

INCLUDED ITEMS:


• P-STAND-2
 • POWER CABLE

DIMENSIONS:

• FIXTURE SIZE: 10.33" X 34.5" X 13.5"
 • FIXTURE WEIGHT: 34.40 lbs
 • PACKAGED SIZE: 39.5" X 15" X 15.5"
 • PACKAGED WEIGHT: 42.35 lb

PART NUMBER:

7048

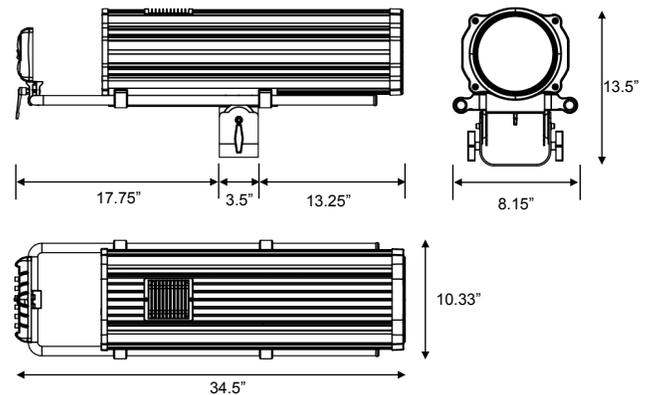**PHOTOMETRICS:**

FIXTURE OPEN:	
CCT	14671 K
CRI	80
TM-30(Rf)	70
TM-30(Rg)	95

CTO 1:	
CCT	10256 K
CRI	81
TM-30(Rf)	71
TM-30(Rg)	94

CTO 2:	
CCT	6218 K
CRI	76
TM-30(Rf)	72
TM-30(Rg)	94

CTO 3 :	
CCT	3901 K
CRI	73
TM-30(Rf)	70
TM-30(Rg)	95