

baby
COLOR Q70 IR





DESCRIPTION



Introducing the Baby Color Q70 IR, the ultimate color-changing fixture designed to transform any space into a vibrant and captivating environment. Powered by seven 10W RGBW LEDs, this compact powerhouse delivers an impressive output that rivals larger fixtures. With its ability to produce a wide range of colors, including delicate pastel shades, the Baby Color Q70 IR lets you unleash your creativity like never before.

Equipped with a 16° beam angle, this fixture provides precise and focused lighting. But that's not all – we've also included a diffuser that increases the beam angle to 25°, giving you even more flexibility in shaping your lighting design.

Control the Baby Color Q70 IR with the included IR Remote, simply point and click to set your desired lighting commands. The remote controller works seamlessly with the diffusion cover, allowing you to adjust your lighting while facing the LEDs in front of the fixture.

Weighing just five pounds, the Baby Color Q70 IR is built for both touring and permanent installations. Its durable construction ensures reliability wherever you take it. Don't settle for ordinary lighting when you can have extraordinary results with the Baby Color Q70 IR.

Elevate your space and captivate your audience with this versatile and powerful color-changing fixture.

Features.




COMPACT

The Baby Color Q70 IR comes with an IR Remote Control that can set lighting commands. The controller can be used with the diffusion cover as long as it is facing the LEDs in the front of the fixture.



COMPACT

This compact, powerful fixture is just five pounds, making it ideal for touring or permanent installations.

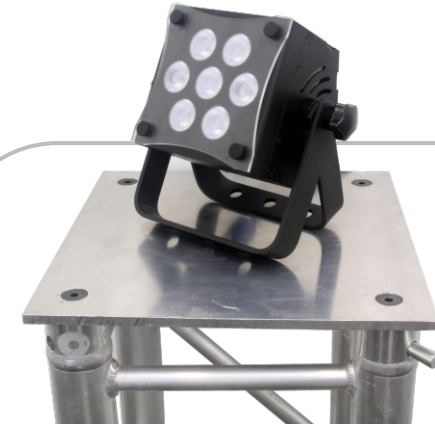

RGBW COLOR-MIXING

This unit is built with seven 10W RGBW LEDs that allow for color-mixing with Red, Green, Blue and White.

Designed to transform any space into a vibrant and captivating environment.



Specifications.

Mechanical Specifications:

DMX Connectors:	5 Pin XLR Connectors In & Out (Optional 3-Pin)
Thermal:	Max Ambient Temperature 104° Max Surface Temperature 140°
Fastening System:	6" Dual Yoke
Display:	LED
Power Supply:	110V-240 50/60 Hz
Power Consumption:	49 Watts / .65 Amps / .61 PF

Control System:

Protocol:	DMX-512
Control Options:	Audio Trigger, Main & Remote Function, Infrared Controller
Channel Modes:	Mode 1 3 Channels R,G,B Mode 2 4 Channels R,G,B,W Mode 3 7 Channels R,G,B,W, Strobe, Macro, Dimmer

Electrical Specifications:

Power Connection:	Power Con Type In and Out
LED Quantity:	7 RGBW
LED Watts:	10W
LED White CCT:	7702K
LED Angle:	16°
Diffusion Beam Angle:	27°
Power Link:	22 Units at 15 Amps @ 110V
Ballast:	Electronic Auto Switching

Dimensions:

Fixture Size:	8.12" x 4.3" x 7.8"
Fixture Weight:	5 lb (2.27 kg)
Packaged Size:	10" x 9.5" x 5.75"
Packaged Weight:	7 lb (3.18 kg)

MEGALITE[®]

WWW.MEGA.LIGHTING

18662 Bandera Rd
Helotes, TX 78023

Phone (210)684-2600 / Fax (210)855-6279
info@mega.lighting

m e g a . l i g h t i n g