



Mike Wood Consulting LLC

3705 Ebony Hollow Pass, Austin, TX 78739

Phone: (512) 288-4916

Cell: (512) 656-6377

www.mikewoodconsulting.com

Megalite Circa LED Center Warm White and Amber Emitters

January 16, 2019

Electrical

Voltage: 120 V AC, 60 Hz

Power: 65 W

VA: 65 VA

Current: 0.52 A

PF: 1.0

Output at full

Lens	Lumens at full output	Efficacy
n/a	933	14 lm/W


Color Rendering

CCT: 1962 K


Duv: -0.0075

CRI (Ra): 82

Spectrum



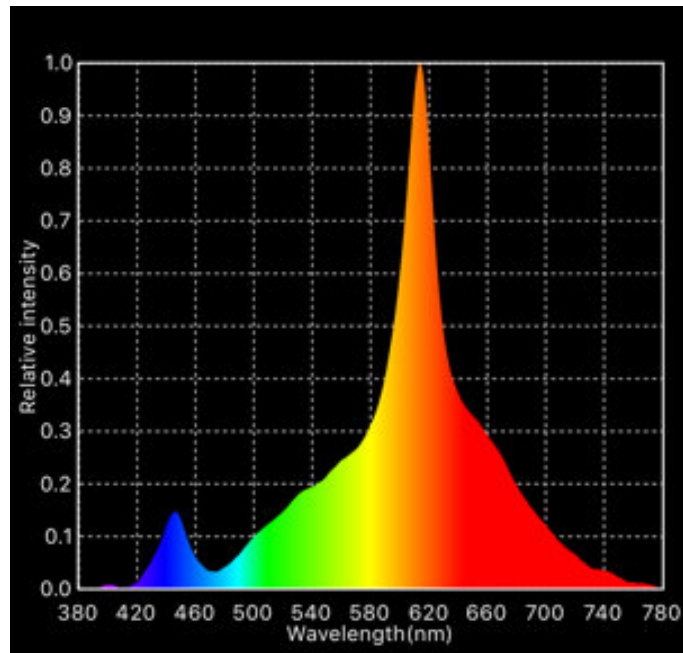


CRI Samples

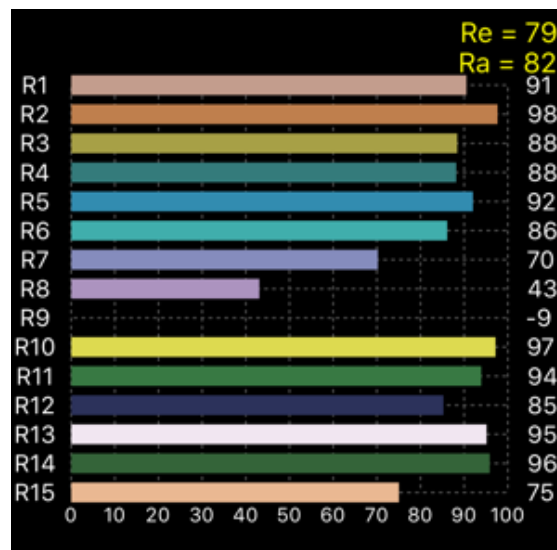

Full Output All Emitters

Lumens at full output : 933 lm

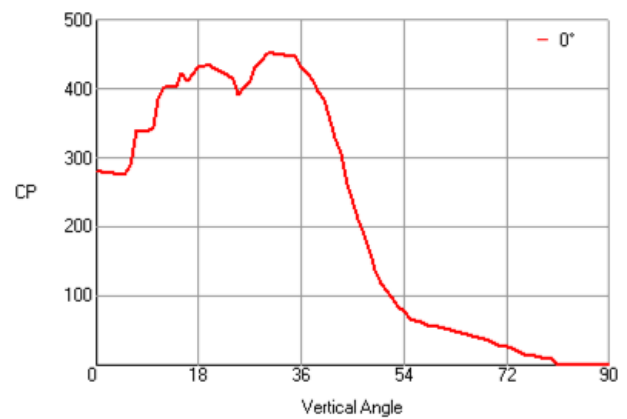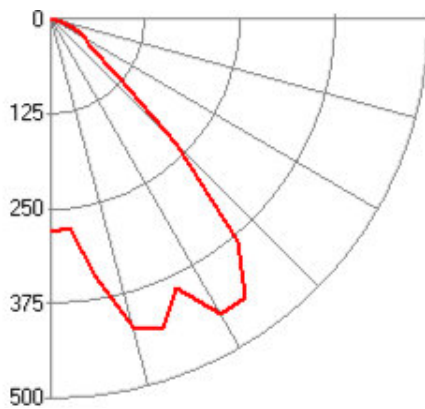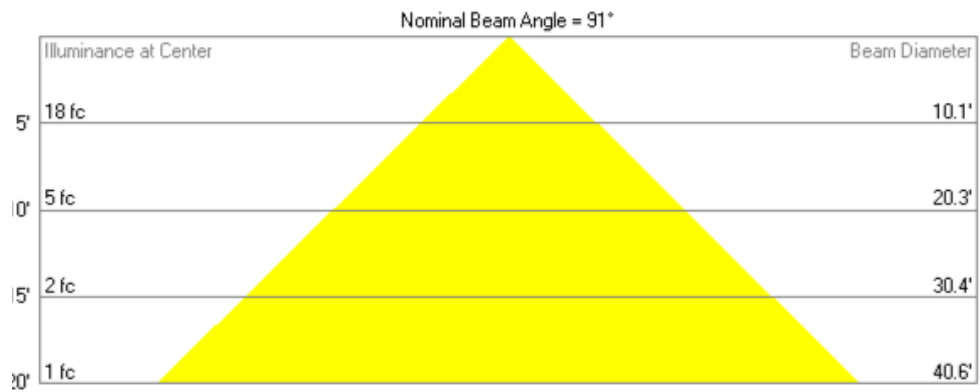

Zonal Lumen Summary

Zone	Lumens
0° - 15°	79
0° - 30°	344
0° - 45°	734
0° - 60°	871
0° - 90°	933
0° - 180°	933

Candela Distribution:

0.0°	280	31.0°	451	62.0°	50
1.0°	280	32.0°	449	63.0°	48
2.0°	278	33.0°	449	64.0°	46
3.0°	278	34.0°	447	65.0°	44
4.0°	276	35.0°	447	66.0°	42
5.0°	276	36.0°	432	67.0°	40
6.0°	288	37.0°	422	68.0°	36
7.0°	341	38.0°	411	69.0°	35
8.0°	338	39.0°	395	70.0°	31
9.0°	338	40.0°	384	71.0°	27
10.0°	345	41.0°	353	72.0°	25
11.0°	384	42.0°	330	73.0°	23
12.0°	403	43.0°	307	74.0°	19
13.0°	403	44.0°	263	75.0°	15
14.0°	403	45.0°	234	76.0°	13
15.0°	422	46.0°	211	77.0°	12
16.0°	412	47.0°	188	78.0°	10
17.0°	422	48.0°	161	79.0°	8
18.0°	432	49.0°	138	80.0°	8
19.0°	434	50.0°	117	81.0°	0
20.0°	435	51.0°	107	82.0°	0
21.0°	430	52.0°	98	83.0°	0
22.0°	424	53.0°	84	84.0°	0
23.0°	420	54.0°	77	85.0°	0
24.0°	414	55.0°	65	86.0°	0
25.0°	391	56.0°	63	87.0°	0
26.0°	403	57.0°	61	88.0°	0
27.0°	412	58.0°	58	89.0°	0
28.0°	432	59.0°	56	90.0°	0
29.0°	441	60.0°	54		
30.0°	451	61.0°	52		