

Mike Wood Consulting LLC

3705 Ebony Hollow Pass, Austin, TX 78739

Phone: (512) 288-4916

Cell: (512) 656-6377

www.mikewoodconsulting.com

Megalite Circa LED Center Reflective Warm White Emitters

January 16, 2019

Electrical

Voltage: 120 V AC, 60 Hz

Power: 163 W

VA: 163 VA

Current: 1.32 A

PF: 1.0

Output at full

Lens	Lumens at full output	Efficacy
n/a	2,680	16 lm/W


Color Rendering

CCT: n/a

Duv: n/a




CRI (Ra): n/a

Spectrum

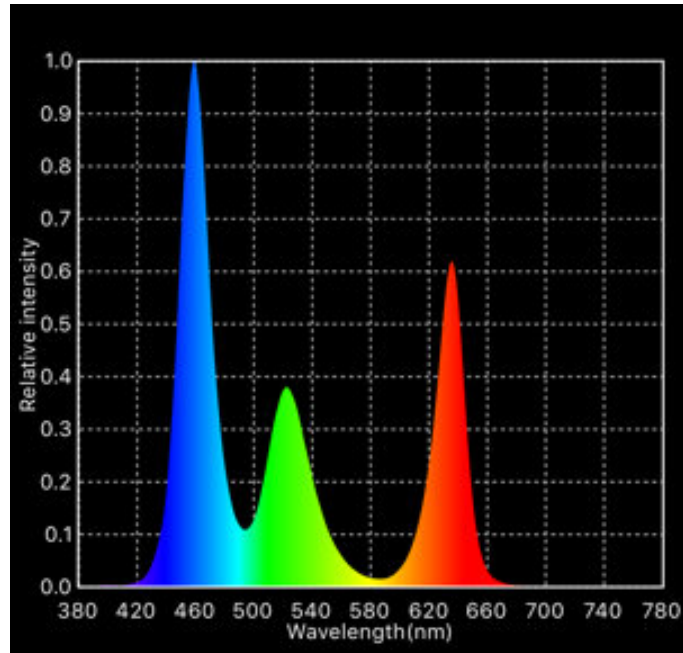

Full Output All Emitters

Lumens at full output : 2,680 lm

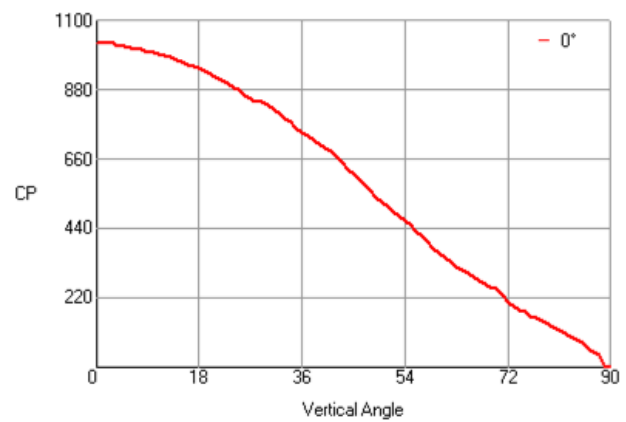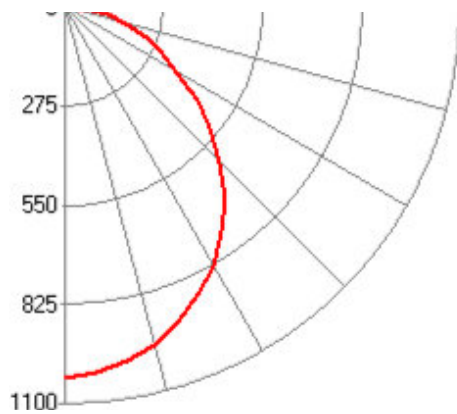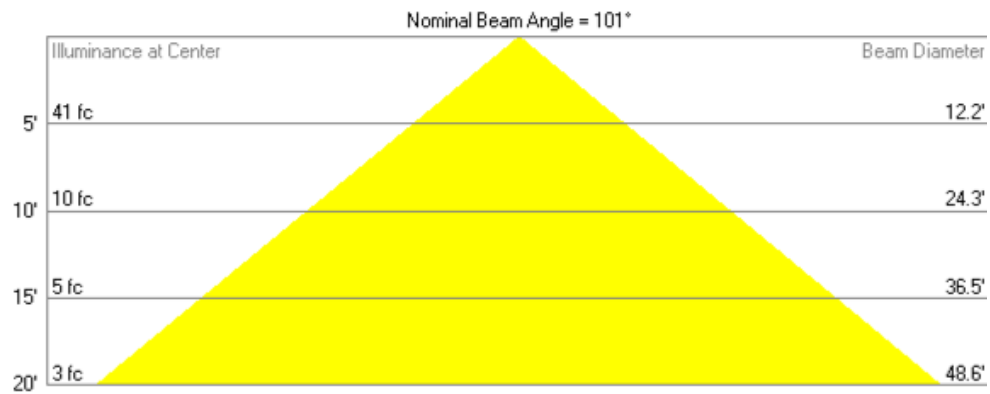

Zonal Lumen Summary

Zone	Lumens
0° - 15°	214
0° - 30°	775
0° - 45°	1497
0° - 60°	2124
0° - 90°	2680
0° - 180°	2680

Candela Distribution:

0.0°	1030	31.0°	819	62.0°	334
1.0°	1030	32.0°	806	63.0°	318
2.0°	1028	33.0°	790	64.0°	309
3.0°	1026	34.0°	777	65.0°	297
4.0°	1020	35.0°	758	66.0°	286
5.0°	1017	36.0°	746	67.0°	274
6.0°	1013	37.0°	735	68.0°	265
7.0°	1007	38.0°	719	69.0°	255
8.0°	1007	39.0°	708	70.0°	246
9.0°	1001	40.0°	694	71.0°	230
10.0°	997	41.0°	685	72.0°	203
11.0°	994	42.0°	668	73.0°	192
12.0°	990	43.0°	650	74.0°	182
13.0°	982	44.0°	627	75.0°	173
14.0°	976	45.0°	610	76.0°	161
15.0°	969	46.0°	595	77.0°	153
16.0°	961	47.0°	575	78.0°	144
17.0°	953	48.0°	556	79.0°	134
18.0°	948	49.0°	537	80.0°	125
19.0°	940	50.0°	524	81.0°	115
20.0°	930	51.0°	508	82.0°	107
21.0°	921	52.0°	493	83.0°	94
22.0°	909	53.0°	480	84.0°	86
23.0°	902	54.0°	464	85.0°	79
24.0°	888	55.0°	451	86.0°	58
25.0°	879	56.0°	432	87.0°	48
26.0°	863	57.0°	414	88.0°	38
27.0°	854	58.0°	395	89.0°	0
28.0°	844	59.0°	378	90.0°	0
29.0°	840	60.0°	361		
30.0°	834	61.0°	347		